



DIN/ISO Chain No.	ANSI Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin length (mm)	Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Q _{min} (kN/LB)	Average tensile strength Q ₀ (kN)	Weight pr. meter q (kg/m)
		P	d _{1max}	b _{1min}	d _{2max}	L _{cmax}	h _{2max}	T _{max}	Pt			
10A-1	50-1	15,875	10,16	9,40	5,08	23,2	15,09	2,03	-	22,2/5045	29,4	1,02
12A-1	60-1	19,050	11,91	12,57	5,94	28,3	18,00	2,42	-	31,8/7227	41,5	1,50
16A-1	80-1	25,400	15,88	15,75	7,92	35,5	24,00	3,25	-	56,7/12886	69,4	2,60
20-A	100-1	31,750	19,05	18,90	9,53	44,7	30,00	4,00	-	88,5/20114	109,2	3,91
24A-1	120-1	38,100	22,23	25,22	11,10	54,3	35,70	4,80	-	127,0/28864	156,3	5,62
28A-1	140-1	44,450	25,40	25,22	12,70	59,0	41,00	5,60	-	172,4/39182	212,0	7,50
32A-1	160-1	50,800	28,58	31,55	14,27	69,6	47,80	6,40	-	226,8/51545	278,9	10,10
36A-1	180-1	57,150	35,71	35,48	17,46	78,6	53,60	7,20	-	280,2/63862	341,8	13,45
40A-1	200-1	63,500	39,68	37,85	19,85	87,2	60,00	8,00	-	353,8/80409	431,6	16,15
48A-1	240-1	76,200	47,63	47,35	23,81	103,0	72,30	9,50	-	510,3/115977	622,5	23,20

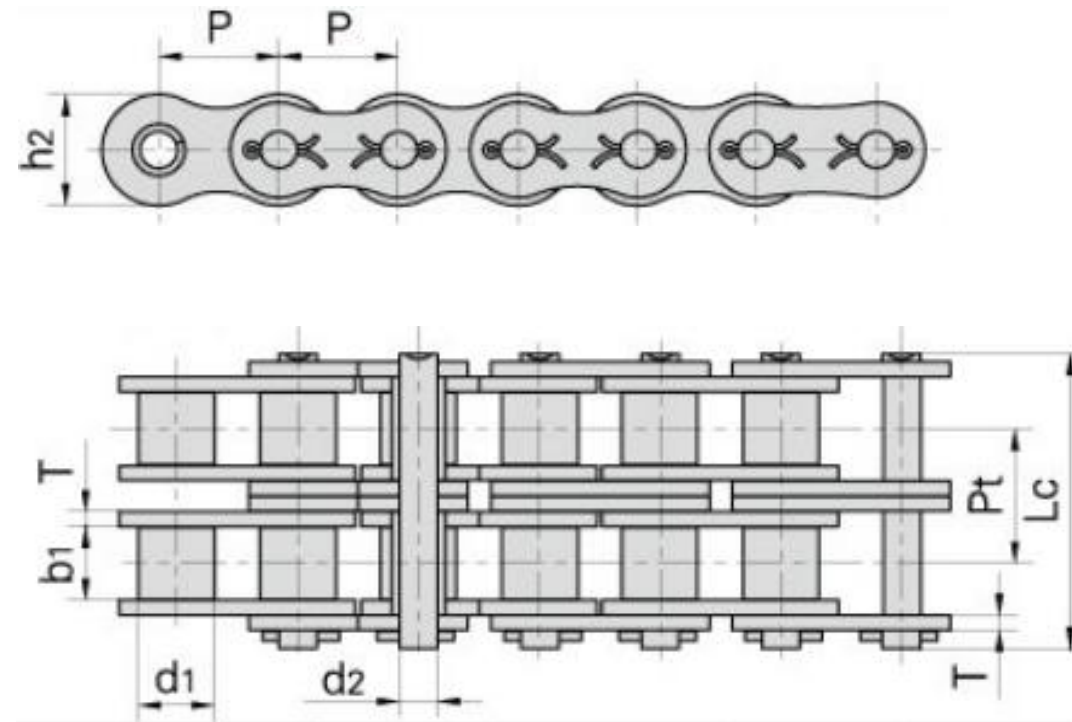

DIN/ISO Chain No.	ANSI Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin Length (mm)	Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Qmin	Average tensile strength Q0	Weight pr. meter q
		P	d1max	b1min	d2max	LCmax	h2max	Tmax	Pt	kN/LB	kN	kg/m
10A-2	50-2	15,875	10,16	9,40	5,08	41,2	15,09	2,03	18,11	44,4/10091	58,1	2,00
12A-2	60-2	19,050	11,91	12,57	5,94	51,1	18,00	2,42	22,78	63,6/13355	82,1	2,92
16A-2	80-2	25,400	15,88	15,75	7,92	65,8	24,00	3,25	29,29	113,4/25773	141,8	5,15
20A-2	100-2	31,750	19,05	18,90	9,53	80,5	30,00	4,00	35,76	177,0/40227	219,4	7,80
24A-2	120-2	38,100	22,23	25,22	11,10	99,7	35,70	4,80	45,44	254,0/57727	314,9	11,70
28A-2	140-2	44,450	25,40	25,22	12,70	107,9	41,00	5,60	48,87	344,8/78364	427,5	15,14
32A-2	160-2	50,800	28,58	31,55	14,27	128,1	47,80	6,40	58,55	453,6/103091	562,4	20,14
36A-2	180-2	57,150	35,71	35,48	17,46	144,4	53,60	7,20	65,84	560,5/127386	695,0	29,22
40A-2	200-2	63,500	39,68	37,85	19,85	158,8	60,00	8,00	71,55	707,6/160818	877,4	32,24
48A-2	240-2	76,200	47,63	47,35	23,81	190,8	72,39	9,50	87,83	1020,6/231955	1255,3	45,23

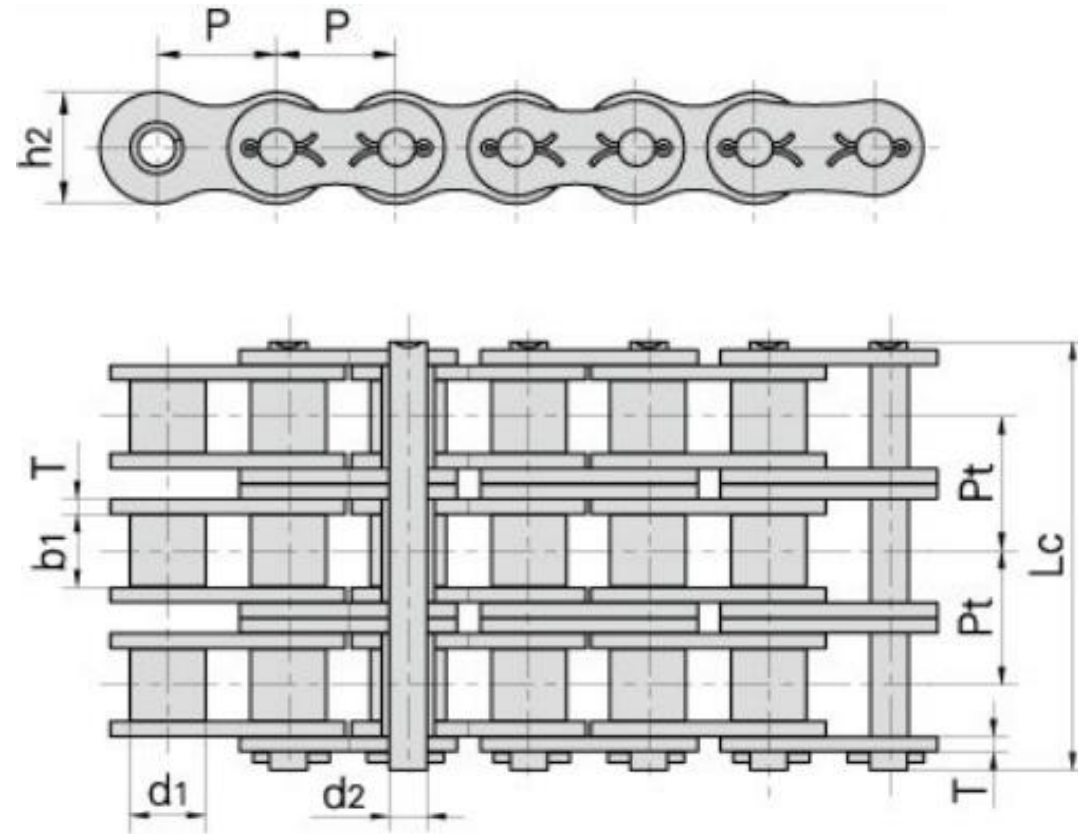

DIN/ISO Chain No.	ANSI Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin Length (mm)	Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Q _{min} (kN/LB)	Average tensile strength Q ₀ (kN)	Weight pr. meter q (kg/m)
		P	d1 _{max}	b1 _{min}	d2 _{max}	LC _{max}	h2 _{max}	T _{max}	Pt			
10A-3	50-3	15,875	10,16	9,40	5,08	59,3	15,09	2,03	18,11	66,6/15136	77,8	3,09
12A-3	60-3	19,050	11,91	12,57	5,94	73,9	18,00	2,42	22,78	95,4/21682	111,1	4,54
16A-3	80-3	25,400	15,88	15,75	7,92	95,1	24,00	3,25	29,29	170,1/38659	198,4	7,89
20A-3	100-3	31,750	19,05	18,90	9,53	116,3	30,00	4,00	35,76	265,5/60341	309,6	11,77
24A-3	120-3	38,100	22,23	25,22	11,10	145,2	35,70	4,80	45,44	381,0/86591	437,2	17,53
28A-3	140-3	44,450	25,40	25,22	12,70	156,8	41,00	5,60	48,87	517,2/117545	593,3	22,20
32A-3	160-3	50,800	28,58	31,55	14,27	186,6	47,80	6,40	58,55	680,4/154636	780,6	30,20
36A-3	180-3	57,150	35,71	35,48	17,46	210,2	53,60	7,20	65,84	840,7/191068	983,6	38,22
40A-3	200-3	63,500	39,68	37,85	19,85	230,4	60,00	8,00	71,55	1061,4/241227	1217,8	49,03
48A-3	240-3	76,200	47,63	47,35	23,81	278,6	72,39	9,50	87,83	1530,9/347932	1756,5	71,60