
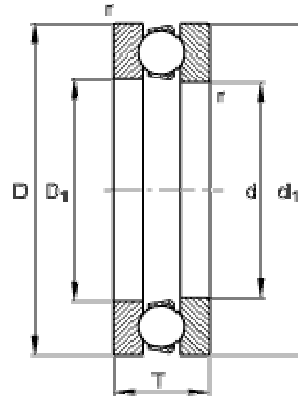


Axial Ball Bearing 51200



Type	Dimensions (mm)						Radial load rating (N)		Speed (1/min)
	d	D	T	D ₁	d ₁	m (kg)	Dynamic	Static	Limiting
51200	10	26	11	12	26	0,029	12700	17000	8000
51201	12	28	11	14	28	0,032	13200	19000	8000
51202	15	32	12	17	32	0,043	16600	25000	6700
51203	17	35	12	19	35	0,050	17300	27500	6700
51204	20	40	14	22	40	0,082	22400	37500	5600
51205	25	47	15	27	47	0,114	28000	50000	5000
51206	30	52	16	32	52	0,136	25000	46500	4800
51207	35	62	18	37	62	0,198	35500	67000	4000
51208	40	68	19	42	68	0,257	46500	98000	3800
51209	45	73	20	47	73	0,279	39000	80000	3600
51210	50	78	22	52	78	0,346	50000	106000	3400
51211	55	90	25	57	90	0,382	61000	134000	3200
51212	60	95	26	62	95	0,649	62000	140000	3000
51213	65	100	27	67	100	0,684	64000	150000	3000
51214	70	105	27	72	105	0,727	65500	160000	2800
51215	75	110	27	77	110	0,819	67000	170000	2800
51216	80	115	28	82	115	0,908	75000	190000	2600
51217	85	125	31	88	125	1,210	98000	250000	2200
51218	90	135	35	93	135	1,660	118000	300000	2000
51220	100	150	38	103	150	2,210	127000	325000	1900
51222	110	160	38	113	160	2,280	134000	365000	1800
51224	120	170	39	123	170	2,660	134000	390000	1700
51226	130	190	45	133	187	3,960	183000	540000	1600
51228	140	200	46	143	197	4,300	190000	570000	1500
51230	150	215	50	153	212	6,080	236000	735000	1400
51232	160	225	51	163	222	6,530	240000	765000	1400
51234	170	240	55	173	237	8,120	285000	930000	1200
51236	180	250	56	183	245	8,560	305000	1040000	1200
51238	190	270	62	194	265	11,600	335000	1160000	1000
51240	200	280	62	204	275	12,000	340000	1220000	1000
51244	220	300	63	224	295	13,100	355000	1340000	950
51248	240	340	78	244	335	22,900	465000	1860000	800
51252	260	360	79	264	355	24,800	490000	2040000	750
51256	280	380	80	284	375	23,700	490000	2160000	750
51260	300	420	95	304	415	41,800	585000	2700000	630
51264	320	440	95	325	435	44,600	600000	2800000	630
51268	340	460	96	345	455	47,600	620000	3050000	600
51272	360	500	110	365	495	70,400	720000	3650000	530