


## Spherical roller bearing 21300

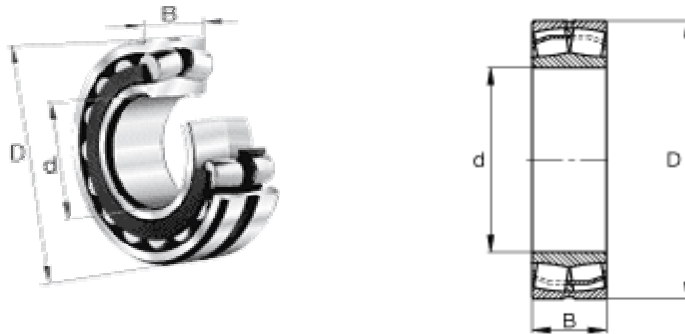

Type	Dimensions				Basic radial load rating (N)		Speed (1/min)	
	d	D	B	m	Dynamic	Static	Limiting	Reference
<b>21304</b>	20	52	15	0,16	36450	30150	15000	12000
<b>21305</b>	25	62	17	0,25	46800	38700	13000	10000
<b>21306</b>	30	72	19	0,39	64800	56700	11000	8500
<b>21307</b>	35	80	21	0,50	74700	66150	9500	8000
<b>21308</b>	40	90	23	0,70	97200	95400	7500	7000
<b>21309</b>	45	100	25	0,85	116100	116100	6700	6700
<b>21310</b>	50	110	27	1,28	116100	116100	6700	6300
<b>21311</b>	55	120	29	1,19	153000	149400	6300	5600
<b>21312</b>	60	130	31	1,78	190800	205200	6300	4500
<b>21313</b>	65	140	33	2,42	225000	243000	5000	4800
<b>21314</b>	70	150	35	3,00	225000	243000	5000	4800
<b>21315</b>	75	160	37	2,86	274500	292500	4800	4300
<b>21316</b>	80	170	39	2,65	274500	292500	4800	4300
<b>21317</b>	85	180	41	5,37	310500	337500	4800	3800
<b>21318</b>	90	190	43	6,26	342000	373500	4500	3600
<b>21319</b>	95	200	45	6,63	387000	409500	4000	3400
<b>21320</b>	100	215	47	8,19	441000	477000	3600	3200
<b>21322</b>	110	240	50	11,10	540000	576000	3000	2800