


UCPG series

Normal Duty, Set Screw Locking. Temperature range -30°C to +110°C

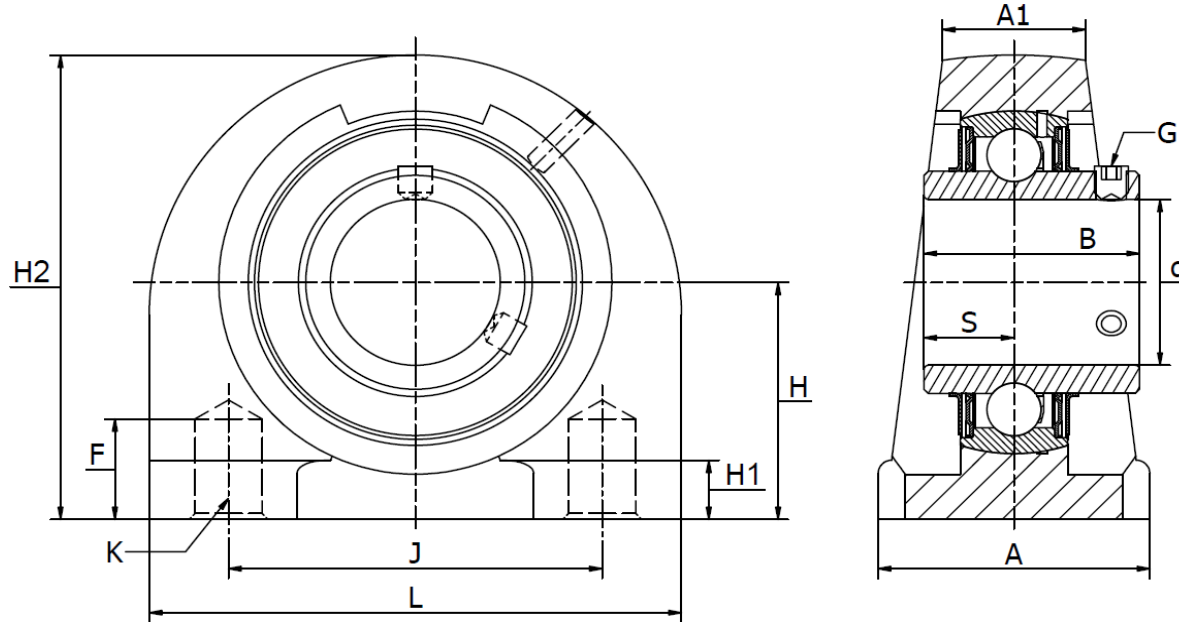

Product No.	d mm	Dimensions(mm)												Bearing No.	Housing No.	Weight (kg)
		H	L	J	A	A1	H ₂	H ₁	S	B	F	G	K			
UCPG 201	12	33,3	70	49	38	20	64	14	12,7	31	16	M6X1	M8	UC201	PG204	0,6
UCPG 202	15	33,3	70	49	38	20	64	14	12,7	31	16	M6X1	M8	UC202	PG204	0,6
UCPG 203	17	33,3	70	49	38	20	64	14	12,7	31	16	M6X1	M8	UC203	PG204	0,6
UCPG 204	20	33,3	70	49	38	20	64	14	12,7	31	16	M6X1	M8	UC204	PG204	0,6
UCPG 205	25	36,5	75	50	38	25	70	15	14,3	34	18	M6X1	M10	UC205	PG205	0,8
UCPG 206	30	42,9	85	60	48	25	83	17	15,9	38,1	18	M6X1	M10	UC206	PG206	1,2
UCPG 207	35	47,6	100	68	48	27	93	20	17,5	42,9	22	M6X1	M12	UC207	PG207	1,7
UCPG 208	40	49,2	110	78	54	30	98	20	19,0	49,2	22	M6X1	M12	UC208	PG208	2,0
UCPG 209	45	53,9	120	85	54	33	106	20	19,0	49,2	25	M6X1	M12	UC209	PG209	2,2
UCPG 210	50	57,2	135	95	60	35	114	21	19,0	51,6	25	M6X1	M16	UC210	PG210	2,8