




SSNHF RH2 - Plummer block housings (SNL MS1 / SSNLD MS1)

Two drilled round mounting bolt holes, ductile iron GGG.

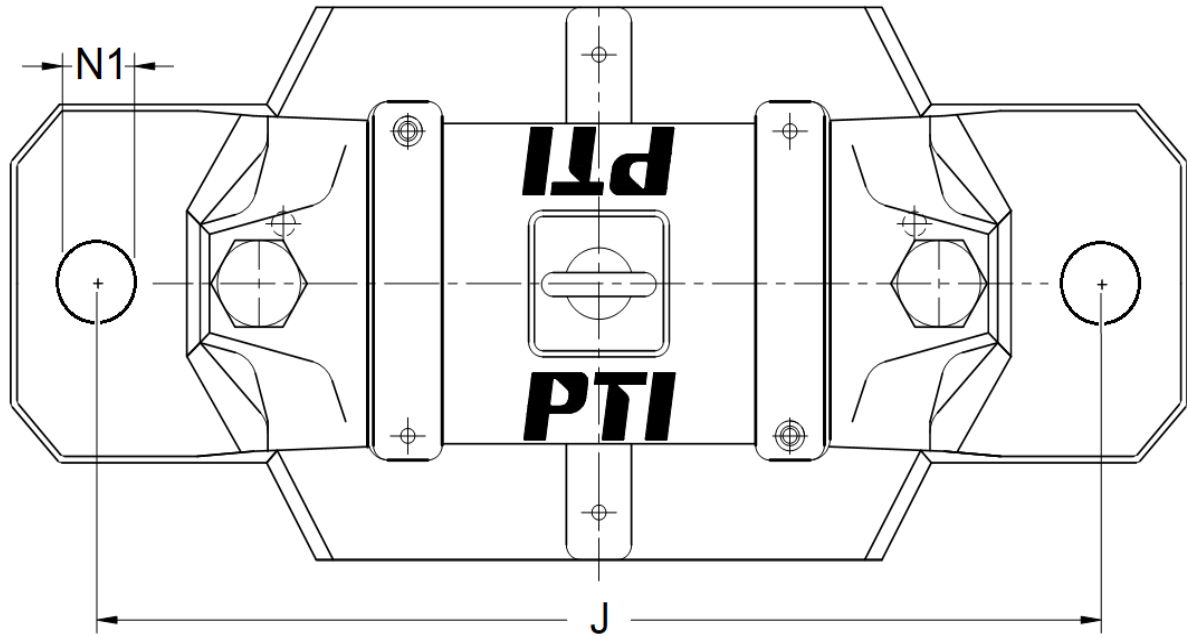

Item No.	Dimensions (mm)		Recommended mounting bolt size	Item No.	Dimensions (mm)		Recommended mounting bolt size
	N1	J			N1	J	
SSNHF 208-307 RH2	15	170	M12	SSNHF 508-607 RH2	15	170	M12
SSNHF 209 RH2	15	170	M12	SSNHF 509 RH2	15	170	M12
SSNHF 210 RH2	15	170	M12	SSNHF 510-608 RH2	15	170	M12
SSNHF 211 RH2	18	210	M16	SSNHF 511-609 RH2	18	210	M16
SSNHF 212 RH2	18	210	M16	SSNHF 512-610 RH2	18	210	M16
SSNHF 213 RH2	18	230	M16	SSNHF 513-611 RH2	18	230	M16
SSNHF 215 RH2	18	230	M16	SSNHF 515-612 RH2	18	230	M16
SSNHF 216 RH2	22	260	M20	SSNHF 516-613 RH2	22	260	M20
SSNHF 217 RH2	22	260	M20	SSNHF 517 RH2	22	260	M20
SSNHF 218 RH2	22	290	M20	SSNHF 518-615 RH2	22	290	M20
				SSNHF 519-616 RH2	26	320	M24
				SSNHF 520-617 RH2	26	320	M24
				SSNHF 522-619 RH2	26	350	M24
				SSNHF 524-620 RH2	26	350	M24
				SSNHF 526 RH2	28	380	M24
				SSNHF 528 RH2	35	420	M30
				SSNHF 530 RH2	35	450	M30
				SSNHF 532 RH2	35	470	M30

See the catalogue [SNHF](#) for the remaining dimensions and standard two elongated mounting bolt holes (LH2).

See the catalogue [SSNHF + SNHF GS Breaking loads](#) for breaking load data

Also available as four elongated mounting bolt holes, series 500, version [SSNHF LH4](#).

Also available as four elongated mounting bolt holes, series 200, version [SSNHF LH4](#).

Also available as four drilled round mounting bolt holes, version [SSNHF RH4](#).

Also available as two elongated mounting bolt holes, version [SSNHF LH2](#).