


Part No.	Material	Type	With/without flange	Taper bush	Ø Max.	Dimensions (mm)							Weight (kg)	
						Dp	De	Df	Dm	Di	F	S		R
HTD 22 8M 20	Steel	5F	FL053	1008	25	56,02	54,65	60	-	37	28	22	6	0,25
HTD 24 8M 20	Steel	5F	FL069	1108	25	61,12	59,75	66	-	44	28	22	6	0,30
HTD 26 8M 20	Steel	5F	FL061	1108	25	66,21	64,84	70	-	45	28	22	6	0,36
HTD 28 8M 20	Steel	5F	FL079	1108	25	71,30	69,93	75	-	50	28	22	6	0,44
HTD 30 8M 20	Steel	5F	FL073	1108	25	76,39	75,02	83	-	58	28	22	6	0,53
HTD 32 8M 20	Steel	5F	FL076	1610	42	81,49	80,16	87	-	63	28	25	3	0,42
HTD 34 8M 20	Steel	5F	FL066	1610	42	86,58	85,22	91	-	64	28	25	3	0,55
HTD 36 8M 20	Steel	5F	FL066	1610	42	91,67	90,30	97	-	68	28	25	3	0,68
HTD 38 8M 20	Steel	5F	FL068	1610	42	96,77	95,39	102	-	72	28	25	3	0,80
HTD 40 8M 20	Steel	5F	FL077	1610	42	101,86	100,49	106	-	76	28	25	3	1,00
HTD 44 8M 20	Steel	8F	FL075	2012	50	112,05	110,67	120	93	-	28	32	4	1,20
HTD 48 8M 20	Steel	8F	FL078	2012	50	122,23	120,86	128	96	-	28	32	4	1,60
HTD 56 8M 20	Steel	8F	FL085	2012	50	142,60	141,23	150	110	-	28	32	4	2,40
HTD 64 8M 20	Steel	8WF	FL090	2012	50	162,97	161,60	168	110	137	28	32	4	2,70
HTD 72 8M 20	Steel	8WF	FL097	2012	50	183,35	181,97	192	110	158	28	32	4	3,30
HTD 80 8M 20	Cast iron	8WF	-	2012	50	203,72	202,35	-	110	180	28	32	4	3,50
HTD 90 8M 20	Cast iron	8A	-	2012	50	229,18	227,81	-	110	204	28	32	4	3,65
HTD 144 8M 20	Cast iron	8A	-	2517	60	366,69	365,32	-	125	336	28	45	17	4,80

Part No.	Material	Type	With/without flange	Taper bush	Ø Max.	Dimensions (mm)							Weight (kg)	
						Dp	De	Df	Dm	Di	F	S		R
HTD 22 8M 30	Steel	5F	FL053	1008	25	56,02	54,65	60	-	37	38	22	16	0,31
HTD 24 8M 30	Steel	5F	FL069	1108	25	61,12	59,75	66	-	44	38	22	16	0,38
HTD 26 8M 30	Steel	5F	FL061	1108	25	66,21	64,84	70	-	44	38	22	16	0,45
HTD 28 8M 30	Steel	5F	FL079	1210	32	71,30	69,93	75	-	50	38	25	13	0,50
HTD 30 8M 30	Steel	3F	FL073	1615	42	76,39	75,02	83	-	-	38	38	-	0,55
HTD 32 8M 30	Steel	3F	FL076	1615	42	81,49	80,16	87	-	-	38	38	-	0,59
HTD 34 8M 30	Steel	3F	FL066	1615	42	86,58	85,22	91	-	-	38	38	-	0,77
HTD 36 8M 30	Steel	3F	FL068	1615	42	91,67	90,30	97	-	-	38	38	-	0,96
HTD 38 8M 30	Steel	3F	FL070	1615	42	96,77	95,39	102	-	-	38	38	-	1,15
HTD 40 8M 30	Steel	3F	FL077	1615	42	101,86	100,49	106	-	-	38	38	-	1,34
HTD 44 8M 30	Steel	4F	FL075	2012	50	112,05	110,67	120	-	86	38	32	3	1,33
HTD 48 8M 30	Steel	4F	FL078	2012	50	122,23	120,86	128	-	90	38	32	3	1,78
HTD 56 8M 30	Steel	4F	FL085	2012	50	142,60	141,23	150	-	110	38	32	3	3,76
HTD 64 8M 30	Steel	8F	FL090	2517	60	162,97	161,60	168	125	-	38	45	7	4,20
HTD 72 8M 30	Steel	8F	FL097	2517	60	183,35	181,97	192	125	158	38	45	7	4,30
HTD 80 8M 30	Cast iron	8W	-	2517	60	203,72	202,35	-	125	180	38	45	7	4,60
HTD 90 8M 30	Cast iron	8A	-	2517	60	229,18	227,81	-	125	204	38	45	7	5,00
HTD 112 8M 30	Cast iron	8A	-	2517	60	285,21	283,83	-	125	254	38	45	7	6,20
HTD 144 8M 30	Cast iron	8A	-	2517	60	366,69	365,32	-	125	336	38	45	7	9,00

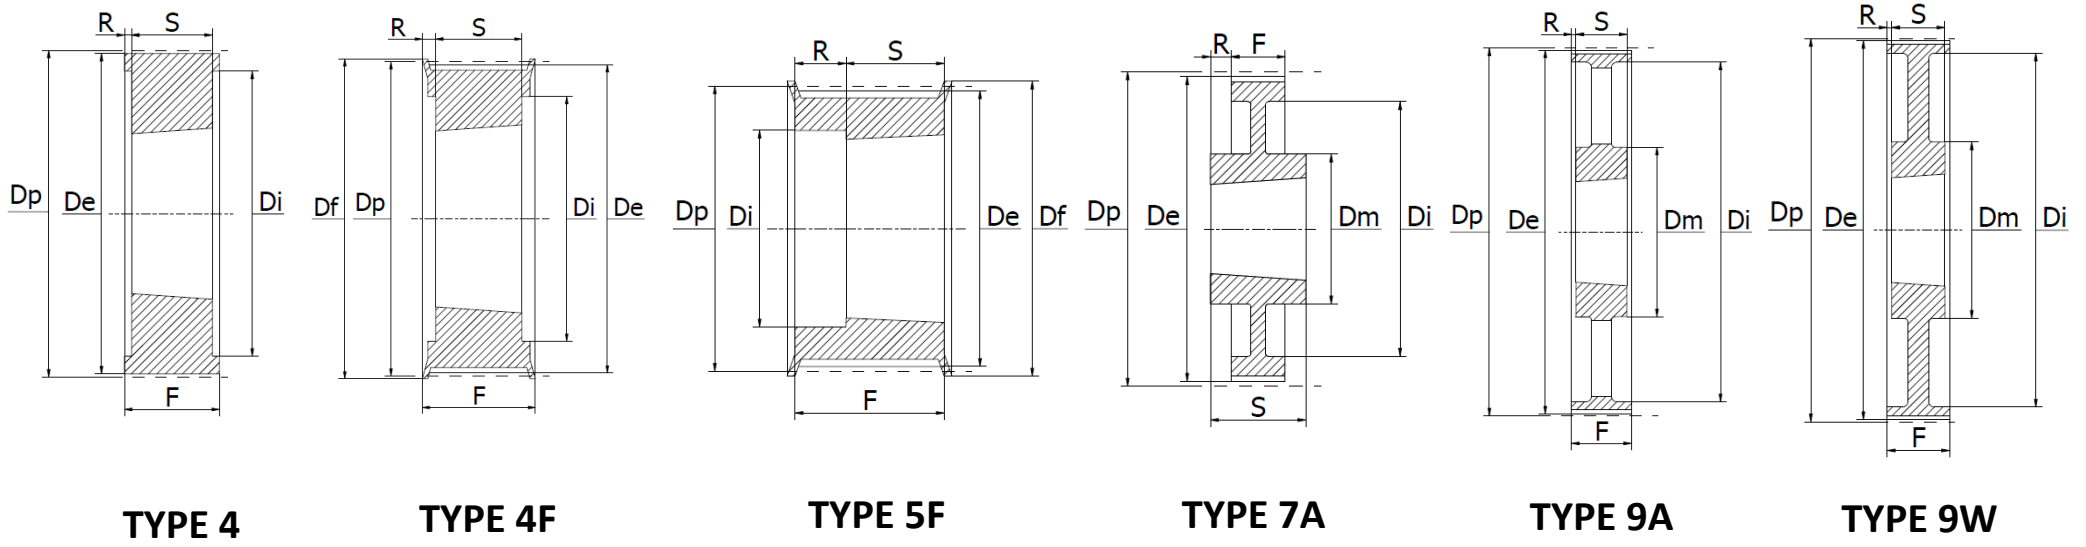

Part No.	Material	Type	With/without flange	Taper bush	Ø Max.	Dimensions (mm)							Weight (kg)	
						Dp	De	Df	Dm	Di	F	S		R
HTD 28 8M 50	Steel	4F	FL079	1210	32	71,30	69,93	75	-	50	60	25	17,5	0,60
HTD 30 8M 50	Steel	5F	FL073	1615	42	76,39	75,02	83	-	58	60	38	22	0,65
HTD 32 8M 50	Steel	5F	FL076	1615	42	81,49	80,16	87	-	62	60	38	22	0,82
HTD 34 8M 50	Steel	5F	FL066	1615	42	86,58	85,22	91	-	65	60	38	22	1,06
HTD 36 8M 50	Steel	5F	FL068	1615	42	91,67	90,30	97	-	68	60	38	22	1,30
HTD 38 8M 50	Steel	5F	FL070	1615	42	96,77	95,39	102	-	72	60	38	22	1,60
HTD 40 8M 50	Steel	4F	FL077	2012	50	101,86	100,49	106	-	82	60	32	14	1,71
HTD 44 8M 50	Steel	4F	FL075	2012	50	112,05	110,67	120	-	91	60	32	14	1,78
HTD 48 8M 50	Steel	4F	FL078	2012	50	122,23	120,86	128	-	95	60	32	14	2,30
HTD 56 8M 50	Steel	4F	FL085	2517	60	142,60	141,23	150	-	116	60	45	7,5	3,40
HTD 64 8M 50	Steel	4F	FL090	2517	60	162,97	161,60	168	-	137	60	45	7,5	5,00
HTD 72 8M 50	Steel	4F	FL097	2517	60	183,35	181,97	192	125	158	60	45	7,5	6,70
HTD 80 8M 50	Cast iron	4	-	3020	75	203,72	202,35	-	-	180	60	51	4,5	8,80
HTD 90 8M 50	Cast iron	9W	-	3020	75	229,18	227,81	-	170	204	60	51	4,5	10,00
HTD 112 8M 50	Cast iron	9W	-	3020	75	285,21	283,83	-	170	260	60	51	4,5	12,00
HTD 144 8M 50	Cast iron	9A	-	3020	75	366,69	365,32	-	170	341	60	51	4,5	15,20
HTD 168 8M 50	Cast iron	7A	-	3525	90	427,81	426,44	-	198	395	60	65	2,5	17,50
HTD 192 8M 50	Cast iron	7A	-	3525	90	488,92	487,55	-	198	455	60	65	2,5	24,00

Part No.	Material	Type	With/without flange	Taper bush	Ø Max.	Dimensions (mm)							Weight (kg)	
						Dp	De	Df	Dm	Di	F	S		R
HTD 34 8M 85	Steel	4F	FL066	1615	42	86,58	85,22	91	-	65	95	38	28,5	1,43
HTD 36 8M 85	Steel	4F	FL068	1615	42	91,67	90,30	97	-	68	95	38	28,5	1,87
HTD 38 8M 85	Steel	4F	FL070	1615	42	96,77	95,39	102	-	72	95	38	28,5	2,20
HTD 40 8M 85	Steel	4F	FL077	2012	50	101,86	100,49	106	-	82	95	32	31,5	1,80
HTD 44 8M 85	Steel	4F	FL075	2012	50	112,05	110,67	120	-	91	95	32	31,5	2,30
HTD 48 8M 85	Steel	4F	FL078	2517	60	122,23	120,86	128	-	100	95	45	25	2,66
HTD 56 8M 85	Steel	4F	FL085	2517	60	142,60	141,23	150	-	117	95	45	25	4,45
HTD 64 8M 85	Steel	4F	FL090	2517	60	162,97	161,60	168	-	137	95	45	25	6,20
HTD 72 8M 85	Steel	4F	FL097	3020	60	183,35	181,97	192	-	158	95	51	22	8,00
HTD 80 8M 85	Cast iron	4	-	3020	75	203,72	202,35	-	-	180	95	51	22	10,00
HTD 90 8M 85	Cast iron	9W	-	3020	75	229,18	227,81	-	170	204	95	51	22	10,80
HTD 112 8M 85	Cast iron	9W	-	3020	75	285,21	283,83	-	170	260	95	51	22	15,00
HTD 144 8M 85	Cast iron	9A	-	3525	90	366,69	365,32	-	198	336	95	65	15	20,00
HTD 168 8M 85	Cast iron	9A	-	3525	90	427,81	426,44	-	198	395	95	65	15	22,00
HTD 192 8M 85	Cast iron	9A	-	3525	90	488,92	487,55	-	198	455	95	65	15	26,00