


## UCFB 200 PPSS Series

3-bolt flanged bracket, thermoplastic, stainless steel bearing with set screw lock.

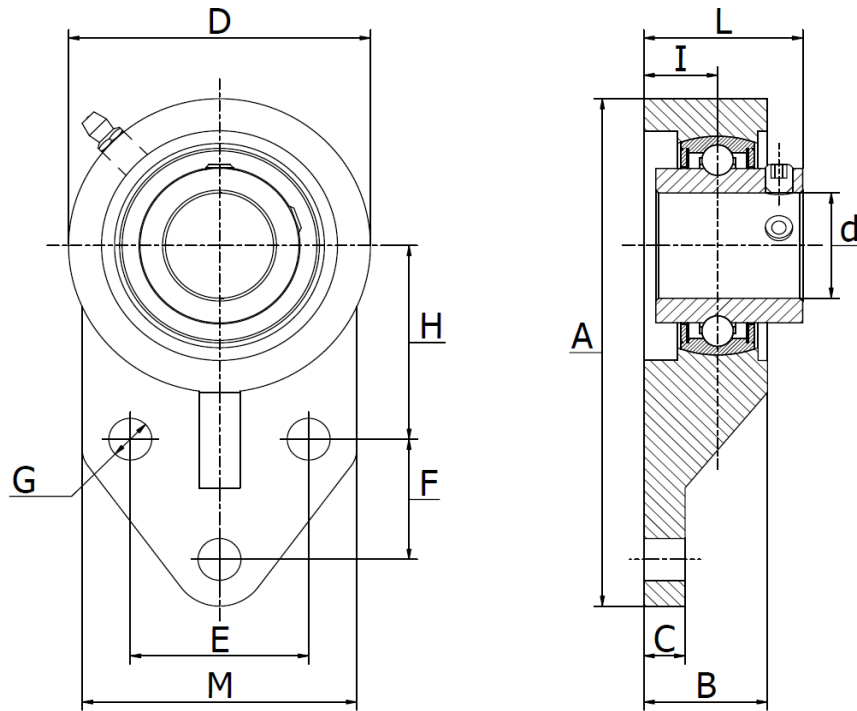

Part No.	d mm	Dimensions (mm)											Bearing No.	Weight (kg)
		A	B	C	D	E	F	G	H	I	L	M		
UCFB 204 PPSS	20	108,5	26,2	12,0	62	38,1	22,2	11	42,9	15,4	33,7	62	UC 204 SS	0,5
UCFB 205 PPSS	25	120,6	33,5	12,0	68,5	41,3	28,6	11	46,0	21	40,8	63,5	UC 205 SS	0,6
UCFB 206 PPSS	30	140	31,5	14,0	83	47,6	31,8	11	52,4	19	41,2	75	UC 206 SS	0,9

### Stainless steel bearing, set screw locking.

Housing: Reinforced PBT (polybutylene terephthalate), solid base.

Operating temperatures of the housing from -20 to +120 °C

Grease nipple: AISI 304 Stainless

Grease: Mobil FM 222 Food Grade FDA & NSF approved

### Bearing Inserts:

Inner & outer races, balls: AISI 420-440 Stainless

Cage: AISI 302 Stainless

Seals: Rubber & AISI 302 Stainless

Set screws: AISI 420 Stainless