




SS 6300 2RS - Stainless Steel Single Row Ball Bearings

Shaft Sizes from 4 mm up to 50 mm.

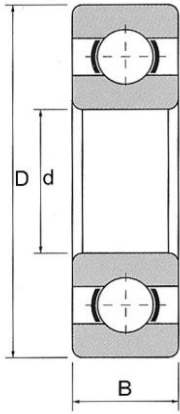

Inner & Outer Races: AISI 440C Stainless

Balls: AISI 440C Stainless

Seals: Rubber

Grease: FDA approved food grease

Operating temperature range: -30°C to +110°C

Part no.	Dimensions (mm)			Dyn. Load Rating kN	Static Load Rating kN	Maximum Speed (RPM)		Weight kg
	d	D	B			Grease	Oil	
SS 634 2RS	4	16	5	0,76	0,25	32000	40000	0,005
SS 635 2RS	5	19	6	2,34	0,88	28000	36000	0,008
SS 636 2RS	6	22	7	2,34	0,80	26000	34000	0,013
SS 637 2RS	7	26	9	3,97	1,96	24000	32000	0,024
SS 638 2RS	8	28	9	3,97	1,96	22000	30000	0,029
SS 639 2RS	9	30	10	4,94	2,32	20000	26000	0,035
SS 6300 2RS	10	35	11	7,30	3,00	15000	21000	0,050
SS 6301 2RS	10	37	12	8,70	3,70	14000	20000	0,060
SS 6302 2RS	15	42	13	10,30	4,70	13000	18000	0,080
SS 6303 2RS	17	47	14	12,00	5,90	12000	17000	0,110
SS 6304 2RS	20	52	15	14,40	7,00	11000	15000	0,140
SS 6305 2RS	25	62	17	20,10	10,10	10000	13000	0,220
SS 6306 2RS	30	72	19	27,00	15,10	8000	10000	0,350
SS 6307 2RS	35	80	21	30,10	17,40	6800	8000	0,454
SS 6308 2RS	40	90	23	39,40	23,10	5800	7200	0,639
SS 6309 2RS	45	100	25	48,00	28,00	5000	6200	0,836
SS 6310 2RS	50	110	27	56,00	34,00	4400	5500	1,082